

Panel Type	54.6" (16:9) LED monitor
Case Type	Metal
Maximum Resolution	1920 (H) x 1080 (V)
Active Display Area	1209.6 mm(H) x 680.4 mm(V)
Pixel Pitch	0.63(H) x 0.63 (V) mm
Bezel Thickness	35mm
Contrast Ratio	1400:1 (Typical)
Brightness	350 cd/m ²
Response Time	6-8 ms
Viewing Angle	U/D: 89°/89°, L/R: 89°/89°
Display Colours	1.07G
Video Synchronization	Yes
PC Compatible Frequency	30-80KHz(H) / 50-75Hz(V)
Adjustable Colour Temperature	9300K / 6500K / 5800K / User
Video Compatibility	Multi-Standard for NTSC / PAL
Aspect Ratio	16:9
VGA Auto Frequency correction	Yes
Speaker	Multimedia Speakers
Number of Speakers	Right x1, Left x1
Sound Demodulation	Stereo, Audio
Mute	Yes
Work Humidity	20% - 70%
Work Temperature	-10 to 50°C
Volume +/- Power On/Off	Yes



POWER

Power Supply	Built In
Voltage	AC100 - 240V 50 / 60Hz
Power Consumption	<150 W, "ON" Mode

OSD CONTROLS

Contrast, Brightness, Clock, Phase, H-Position, V-Position, Language

OSD LANGUAGE


English, French, German, Spanish, Italian, Russian, Polish and Portuguese

ACCESSORIES

Kettle Lead/ VGA Cable/ Audio Cable/ User Manual /Remote Control

IN/OUT INTERFACE

Video Interface	HDMI x1, VGA x 1, BNC x 2 In/ BNC x 2 Out
Audio Interface	Audio In x1
Power Interface	AC in x 1
Termination	75 Ohms (Automatic termination)
Safety & EMC Certification	CE & ROHS
Vesa Standard Mount	800 X 400mm, 600 X 400mm
Stand Type	Desktop
Colour	Black
Packing Dimension	1464 (W) x 250 (H) x 945 (D) mm
NET Weight	32.5 Kg
GROSS Weight	39.8 Kg

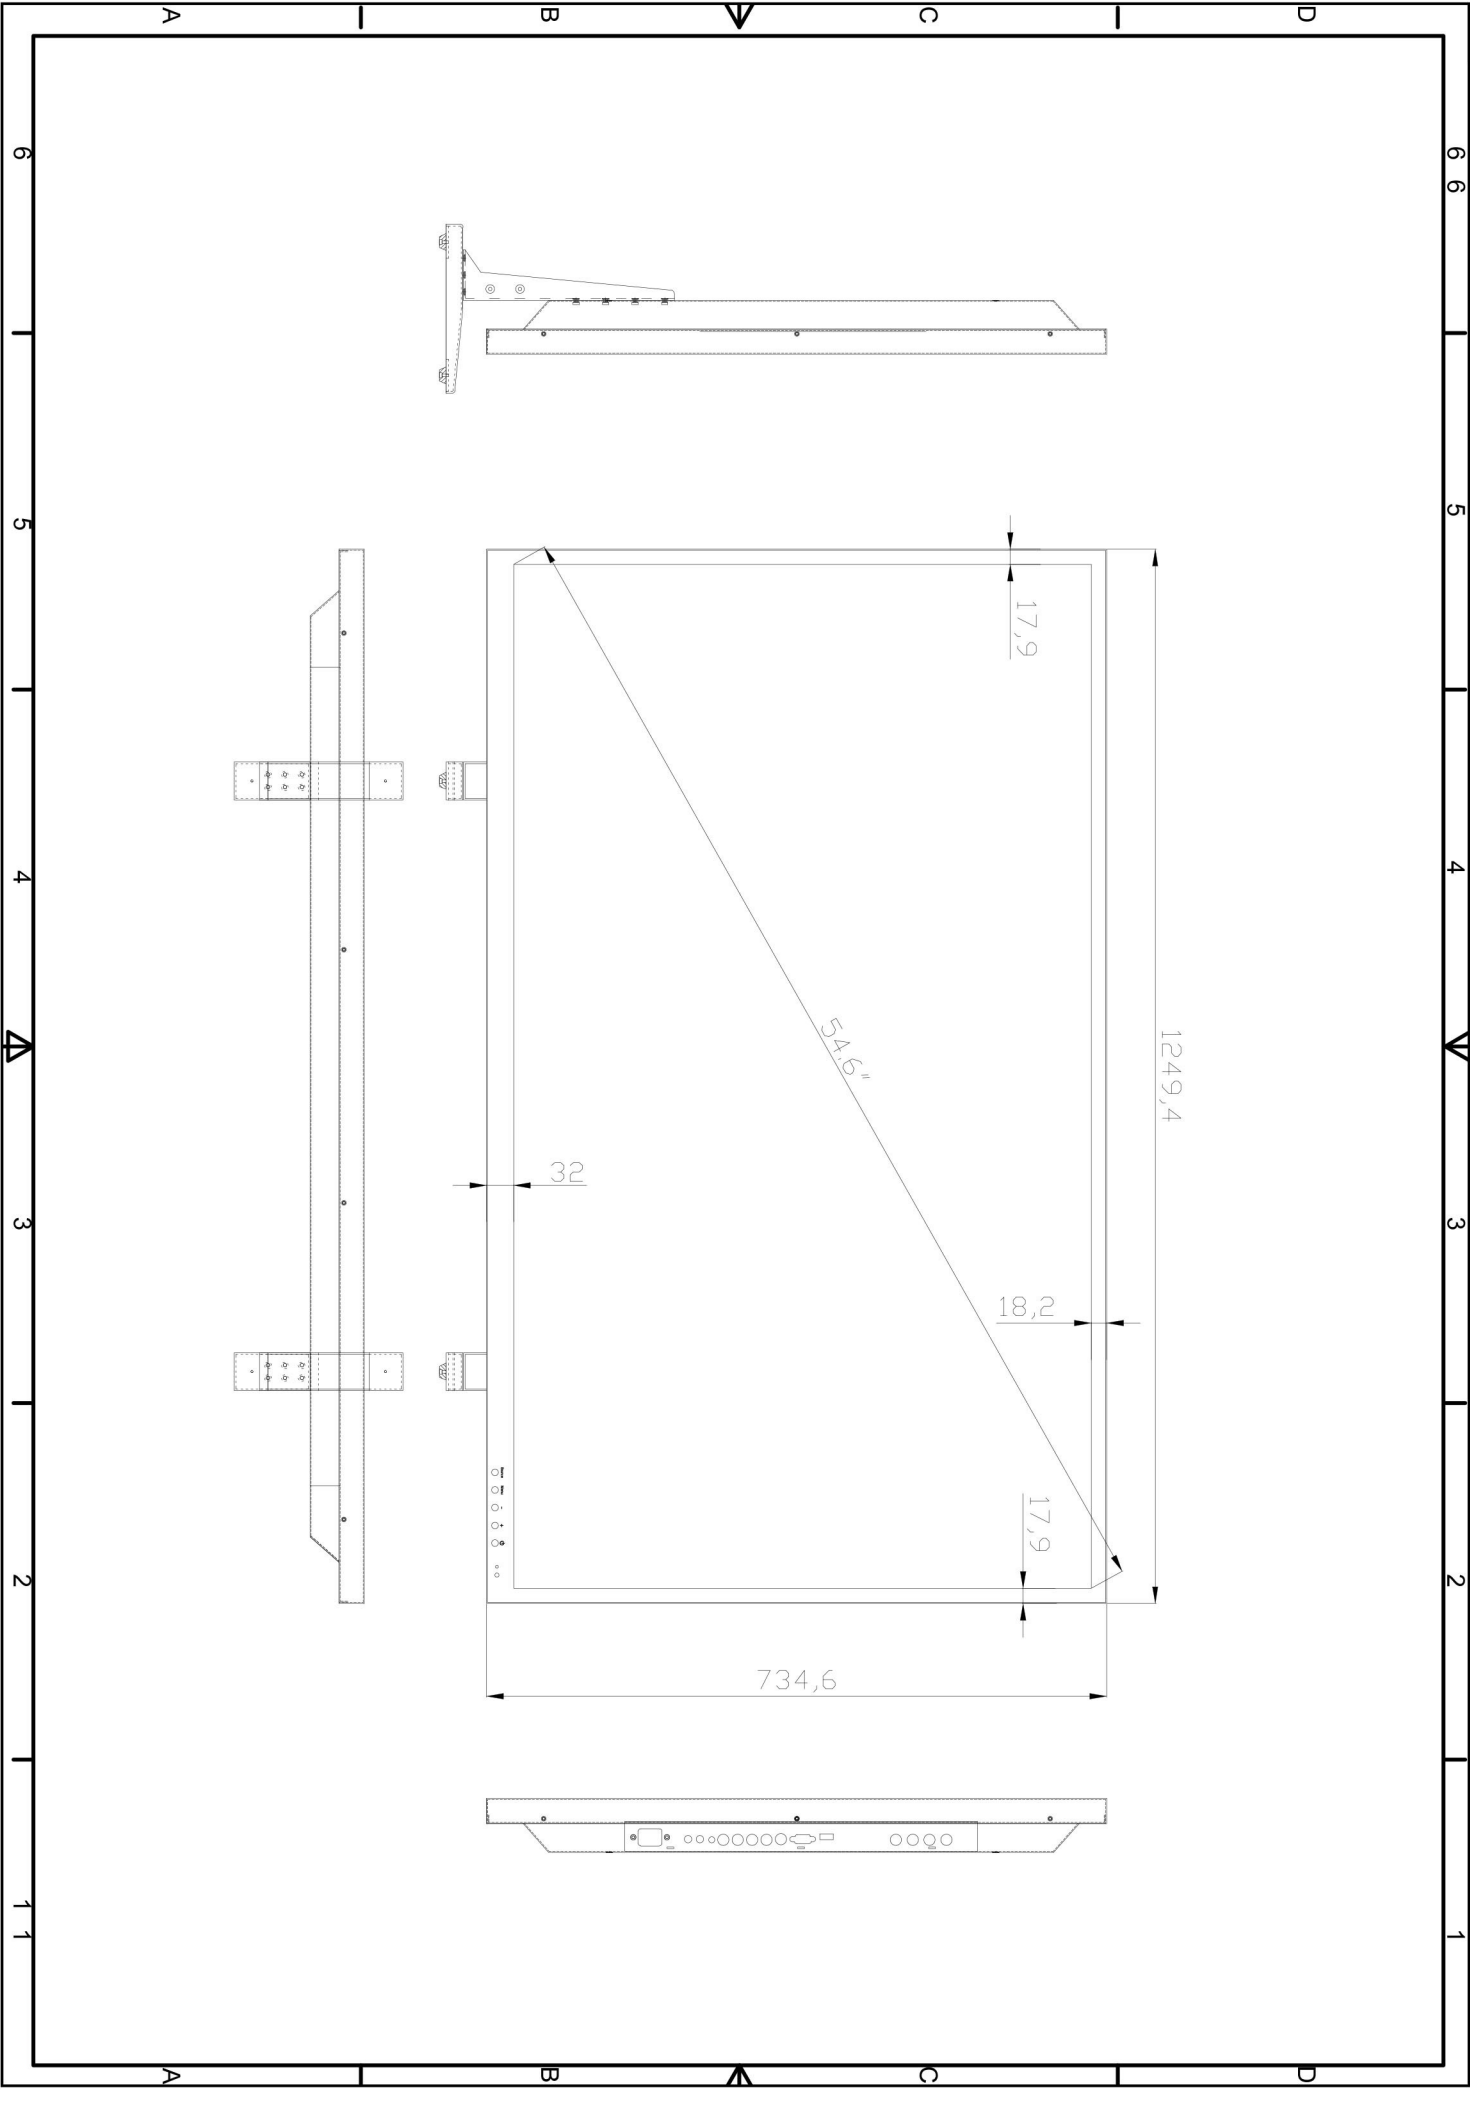

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D

6 5 4 3 2 1

A B C D