



## General


- IP 66 Weather-proof Flame Retardant Polycarbonate Housing
- Side Opening Type
- Outdoor and Indoor use
- Vandal proof construction / available cable management bracket

## Spécifications / Technische Datten



Mécanique	Mechanisch	IP66 Polycarbonate ignifuge
Poids	Gewicht	3,1 Kg
Température	Einsatztemperatur	-30°C → 65°C
Humidité	Luftfeuchte	0% → 90%
Dimension externe	Externe Dimension	584 x 274 x 168 mm
Certification	Zertifizierungen	CE
Alimentation	Betriebspannung	12 VDC, 110 W
Usages	Anwendungen	Désert / Wildnis, autoroute / Autobahn, port maritime / Seehafen, usine chimique / chemische Fabrik, station-service / Tankstelle, régions chaudes / heiße Bereiche

## Dimensions / Abmessungen

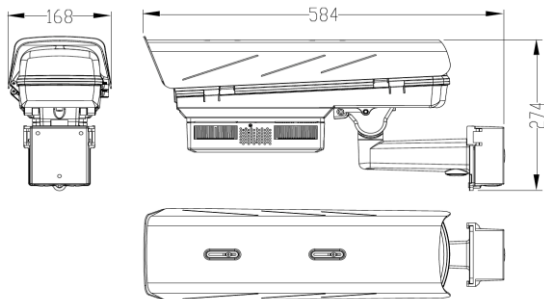

## Information pour la commande / Bestellangaben

- CK 516



est une marque de Risk'Expert  
63, rue de Hollerich  
L 1741 Luxembourg  
Tél. : +352 26 19 02 74

L'offre globale dédiée à vos risques



[www.riskexpert.lu](http://www.riskexpert.lu)  
[contact@riskexpert.lu](mailto:contact@riskexpert.lu)